


Industrial 3 Port RS232 shielded Serial Splitter for DIN rail mounting

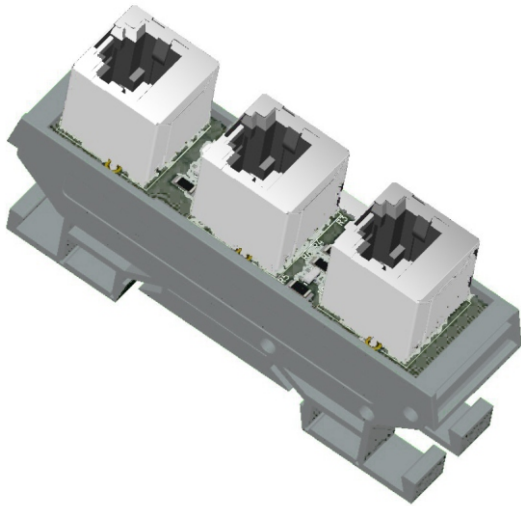

Specifications

Model number: **EC SSP 8-RJ**

Interface: **RS232**

Leads Supported: **CTS, DSR, GND, RxD,TxD, DCD, DTR, RTS**

Connectors: **3 x RJ45 female shielded**

Mechanical: **22mmH x 82mmW x 43mmD**

Weight: **30g**

3 way serial data splitter is a cost effective solution when you need to manage and control multiple RS232 Terminal Device / Modem

Connections Examples

1: Monitor and Control Multiple Terminal Device via 1 Computer

1 PC, connected to any port, and 2 devices to other ports via serial cables separately (functioned as RS232 splitter: 1 master to control 2 slave).

Serial port combiner splits 1 port in multi hardware COM ports that are used by several applications, so those applications can receive the same data from PC at once (duplicator).

2: Capture Data communication between Terminal Device and Computer

2 PCs connected to any port, and 1 data acquisition equipment to third port via serial cables separately.


Several PCs to receive data from 1 device, allowing you to share multiple PCs on a single peripheral; only 1 PC device can send data at a time.

Easy and Simple


No need of driver, plug and play; serial port splitter will automatically output the values if it is wired.

Each port is interchangeable DTE or DCE.
3x RJ45 female terminal
No baud rate limit

SCADA tailored solutions for mounting in 19 inch Cabinets.

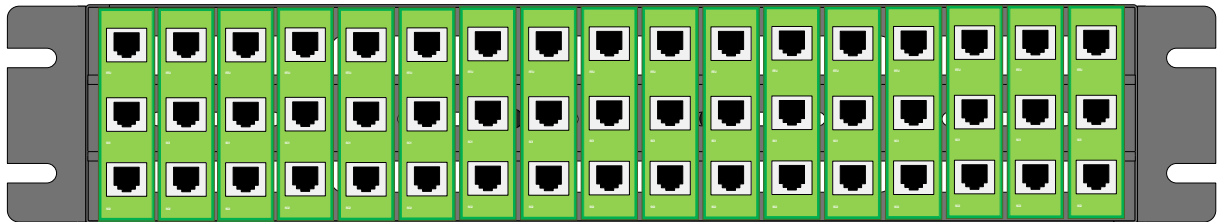

RS-232 (female RJ45) Pinouts

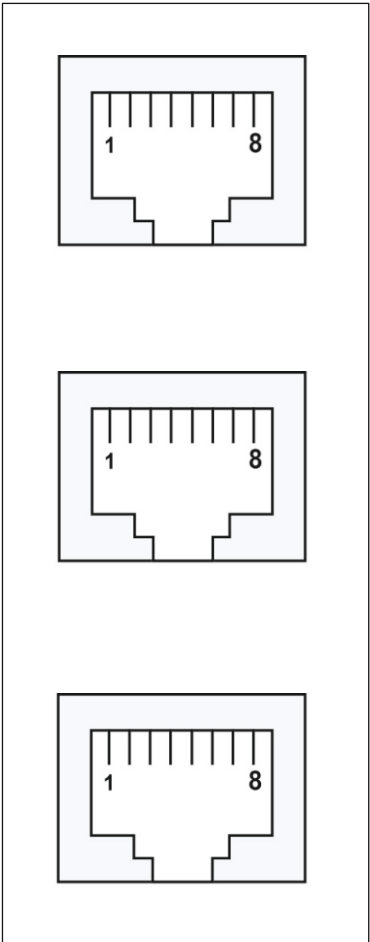

PIN	RS-232
1	CTS ←
2	DSR ←
3	GND —
4	RxD ←
5	TxD →
6	DCD ←
7	DTR →
8	RTS →

PIN	RS-232
1	CTS ←
2	DSR ←
3	GND —
4	RxD ←
5	TxD →
6	DCD ←
7	DTR →
8	RTS →

PIN	RS-232
1	CTS ←
2	DSR ←
3	GND —
4	RxD ←
5	TxD →
6	DCD ←
7	DTR →
8	RTS →